




MedinPure[™] PVC-Free
Homogeneous Sheet



Reconnect with Nature

Inspired by nature, the MedinPure color palette thoughtfully connects us with the natural world – bringing a sense of serenity indoors. Soothing neutrals and tranquil colors can be combined to assist in wayfinding and create calm, comfortable spaces designed to promote healing.

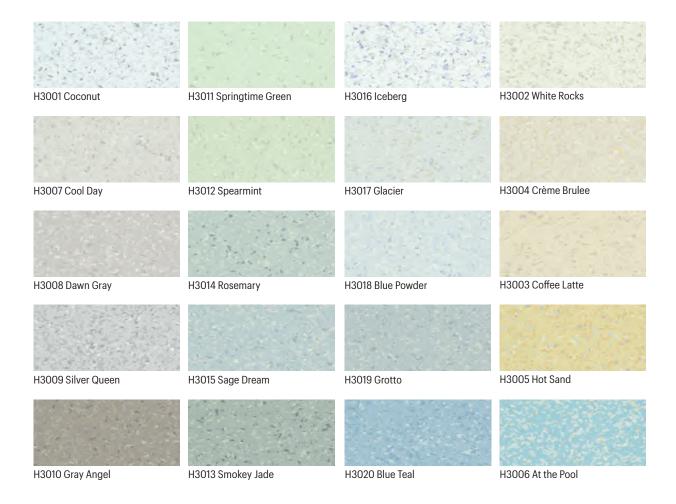


Building Better



We share your commitment to transparency and building a better environment together:

- PVC-free formulation with coordinating PVC-free weld rods for aseptic areas demanding superior infection control.
- Low VOC emissions and FloorScore® certified.
- Free of Plasticizers, Ortho-Phthalates, Halogens, Isocyanates and Red List Chemicals of Concern.
- LEED v4 contributing Health Product Declaration (HPD) and Environmental Product Declaration (EPD).

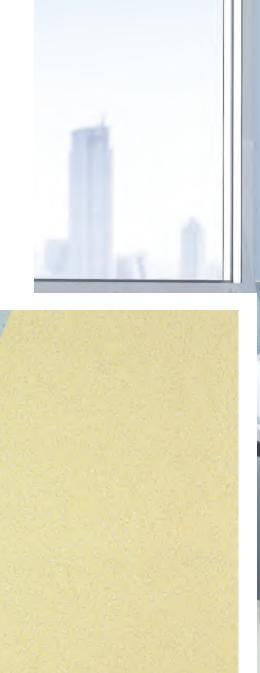



H3005 Hot Sand, H3019 Grotto

Superior infection control with heat welded seams for spaces demanding enhanced sterilization.






Diamond 10[®] Technology

Diamond 10 Technology coating provides the ultimate scratch, stain, and scuff resistance. It's a no-polish, easy-to-clean solution that is designed to look beautiful for years to come, despite daily maintenance and rigorous disinfection protocols.

- Protects against scratches, stains, and scuffs for floors that look newer, longer.
- Offers ease of maintenance no polishing, stripping, or restorative maintenance required.



H3001 Coconut, H3013 Smokey Jade



- 1. Diamond 10® Technology
- 2. Through Pattern Wear Layer

10 Year Commercial Limited Warranty

Supported by a 10 Year Commercial Warranty. Add 10 years of overall warranty coverage by using Strong System™ subfloor preparation products. Visit armstrongflooring.com for more information.

Product Information

Construction - PVC-Free Homogeneous Sheet

International Specifications - ASTM F1913*, EN 14565, ISO 10581*

Overall Thickness - 0.080 in. (2.0 mm)

Wear Layer Thickness - 0.080 in. (2.0 mm)

Size - Up to 75.46 ft (20 m) 6.56 ft. (1.98 m)

Factory Finish - Diamond 10® Technology

Installation - Full Spread Adhesive: S-319 Roll Strong™, S-995. Seams: Heat Weld with PVC-Free Weld Rods or S-761 Seam Adhesive

Maintenance Options - No Polish - No Buff, Polish Optional

*Performance requirements only; product is free of halogens, including chlorine (PVC), fluorine, bromine, iodine.

Shade may vary from sample.



Walk On. Walk Strong:







Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation and Maintenance recommendations.

Print# F10746-122