ROBBINS®

PHOTO: Shenandoah, Ash, HPEA671W

This room scene is for illustrative purposes only. No two floors are ever the same. These natural wood planks have a high level of variation which can include knots, mineral streaks, color, and grain variations. Nature individualizes each plank to show its unique beauty.

TIMBER LEGENDS™ | DENSIFIED HARDWOOD
With ArmorWood™ Densified Wood Technology

A Historical Legacy With Unmatched Durability

Our Timber Legends™ collection is an ode to the coveted, historic, and once thought lost Longleaf pine. By combining careful and sustainable logging practices, with our densified wood technology, Timber Legends is a revolutionary breakthrough in hardwood flooring. It's a collection that honors the past but is reimagined for the future.

Timber Legends pays homage to Longleaf pine, known for its dense, strong and rot/insect/resistant wood. Nearly logged to extinction in the 1990s, only a small fraction of the original forests remain today. In collaboration with Menominee Tribal Enterprises, known for sustainable logging practices for 160 years, Timber Legends is made from a readily available and managed resource that will be available for future generations. It is enhanced to be the most scratch and dent resistant wood flooring available – and with a sustainability story that is equally as existing.

LIFETIME LIMITED RESIDENTIAL WARRANTY	10-YEAR LIMITED COMMERCIAL WARRANTY

- 6X More Dent Resistance
- 4X More Scratch Resistance
- Available in 6 Unique Species
- Waterproof* *See Warranty For Details
- 100% Real Hardwood

Scan to learn more about Timber Legends™ Densified Hardwood Flooring

Cleantivity Antimicrobial Protection — Inhibits the Growth of Bacteria

MADE IN THE USA with U.S. and Global Components.

floor score

*See warranty for details.

TIMBER LEGENDS™

ROBBINS®

The ArmorWood Densified Wood Technology Advantage

Timber Legends utilizes our patented technology of heat and pressure to create a revolutionary hardwood floors that's 100% natural and tougher than typical hardwood.

#1 IN DENT RESISTANCE

When tested for indentation resistance by ASTM D2394, a 2″ weighted metal ball is dropped from a 60″ height and indent impact levels are measured - Timber Legends performed best!


SPC


LAMINATE


ENGINEERED WOOD


SOLID WOOD


TIMBER LEGENDS

ENGINEERED FROM THE INSIDE OUT

DOG SCRATCH TEST

Timber Legends has equivalent performance as SPC and Laminate along with being superior to Traditional Solid and Traditional Engineered Wood.


SPC


LAMINATE


ENGINEERED WOOD


SOLID WOOD


TIMBER LEGENDS

JANKA HARDNESS OF DENSIFIED VS. ORDINARY HARDWOOD

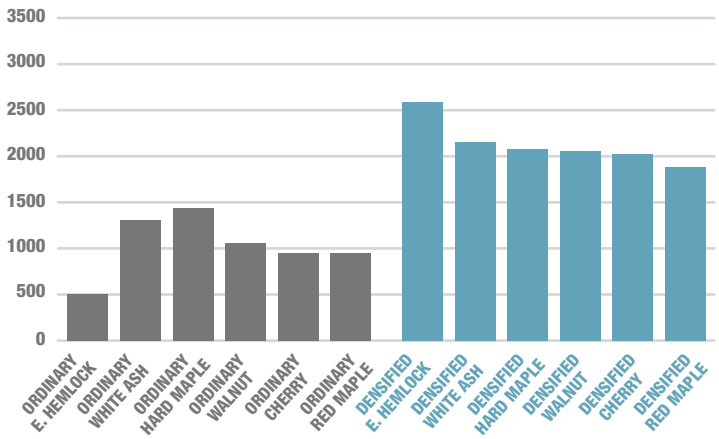

TIMBER LEGENDS – THE TOUGHEST FLOOR EVER MADE!

Our patent pending process uses simply heat and pressure to close the open cells in hardwood and desifies the wood making it the hardest flooring on the market.

RAW MATERIAL WALNUT - 4.5 MM WITH 2″ BALL DROP AT 60″ - SEVERE DAMAGE FROM BALL

DENSIFIED WALNUT - 3.0 MM WITH 2″ BALL DROP AT 60″ - NO NOTICEABLE DAMAGE FROM BALL

TIMBER LEGENDS™

ROBBINS®

ASH

Shenandoah
7-1/2" HPEA671W

Natural
7-1/2" HPEA691W

CHERRY

Natural
7-1/2" HPEC661W

WALNUT



Natural
8-1/2" HPEW801W

PINE

Native Pine
7-1/2" HPEP651S



Southern Lake
7-1/2" HPEP621S

Long Leaf
7-1/2" HPEP631S

Cone Brown
7-1/2" HPEP641S

MAPLE

White Maple
7-1/2" HPEM611W

RED MAPLE

Light Maple
7-1/2" HPEM681W

TIMBER LEGENDS™ DENSIFIED HARDWOOD							
SPECIES	Ash, Cherry, Pine, Maple, Red Maple, Walnut	THICKNESS	7-1/2″: 7/16″ 7-1/2″: 1/2″ (Pine) 8-1/2″: 1/2″	CONSTRUCTION	Densified Wood	LIGHT SENSITIVITY	Moderate
WIDTH	7-1/2″, 8-1/2″	GLOSS	Low	FINISH	Urethane		
TEXTURE	Traditional Smooth Wire-Brushed	FACE VENEER	7-1/2″: 2.0 mm - Sawn 8-1/2″: 3.0 mm - Sliced	STRUCTURE	Plywood Core		
EDGE DETAIL	Micro-beveled edges and ends			LENGTH	96″ max, 10″ min		
INSTALLATION	Glue, Float, Staple with Glue Assist* Below / On / Above Ground Level			WARRANTY	Lifetime Limited Residential 10-Year Limited Commercial		
CARTONS PER PALLET	Pine: 48 7-1/2″: 48 8-1/2″: 40	SQ FT PER CARTON	Pine: 24 7-1/2″: 28 8-1/2″: 32	SQ FT PER PALLET	Pine: 1152 7-1/2″: 1344 8-1/2″: 1280	PALLETS PER TRUCK/ CONTAINER	Pine: 18 7-1/2″: 20 8-1/2″: 17

TIMBER LEGENDS™

ROBBINS®

	QUARTER ROUND	T-MOLDING	REDUCER STRIP	THRESHOLD	STAIRNOSE
Shenandoah	TQ0AS1088LW	TM0AS1088LW	TR4AS1088LW	TH0AS1088LW	TS4AS1088LW
White Maple	TQ0MA1082LW	TM0MA1082LW	TR4MA1082LW	TH0MA1082LW	TS4MA1082LW
Natural *Walnut*	TQ0WA1081LW	TM0WA1081LW	TR5WA1081LW	TH0WA1081LW	TS5WA1081LW
Native Pine	TQ0AS1086LS	TM0AS1086LS	TR5AS1086LS	TH0AS1086LS	TS5AS1086LS
Southern Lake	TQ0AS1083LS	TM0AS1083LS	TR5AS1083LS	TH0AS1083LS	TS5AS1083LS
Natural *Cherry*	TQ0CH1087LW	TM0CH1087LW	TR4CH1087LW	TH0CH1087LW	TS4CH1087LW
Long Leaf	TQ0AS1084LS	TM0AS1084LS	TR5AS1084LS	TH0AS1084LS	TS5AS1084LS
Cone Brown	TQ0AS1085LS	TM0AS1085LS	TR5AS1085LS	TH0AS1085LS	TS5AS1085LS
Light Maple	TQ0MA1089LW	TM0MA1089LW	TR4MA1089LW	TH0MA1089LW	TS4MA1089LW
Natural *Ash*	TQ0AS1090LW	TM0AS1090LW	TR4AS1090LW	TH0AS1090LW	TS4AS1090LW

*For widths greater than 5", in addition to the use of mechanical fasteners, glue assist is required. See installation instructions for additional details

WR-1172-725 FloorScore® is a trademark of the Resilient Floor Covering Institute. All other trademarks owned by AHF, LLC. © 2025 AHF, LLC.

NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual flooring material.