

ROBBINS® Momenti Dolci™ Porcelain Stone®

Available Colors



OS24428 ▶ Snow Fall



OS24433 ▶ Silver Lining



OS22438 ▶ Raven Wing

Features and Benefits


- Unique Leathered finish offers the softest touch
- Subtle, minimalist veining resists high traffic and the elements indoors and out, thanks to an additional textured exterior finish offered in the line, for installations that flow from indoors to out.
- Field tiles range 24"x48" to 12"x24"
- The line's distinct triangular mosaic opens many design possibilities for floors and walls along with a 2"x2" mosaic.
- Complete your installations with 4 x 24 bullnose or 6 x 12 cove base
- Made in the USA and Green Squaresm Certified

ROBBINS®

ROBBINS® Momenti Dolci™ Porcelain Stone®

Sizes (Shown in OS12441 Raven Wing)

24 x 48

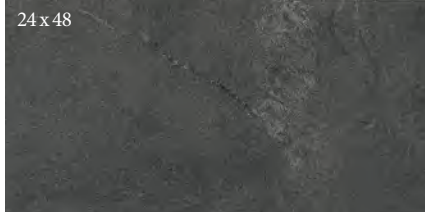

24 x 24




12 x 24



Geometric Mosaic†

(Mounted on a
217 x 372 mm sheet)



2 x 2 Mosaic

(Mounted on a
298 x 298 mm sheet)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.



Detail of
OS12441 Raven Wing LTR
(Leather) finish.

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	LTR/EXT*
24 x 24	597 x 597	9.5	3	LTR/EXT
24 x 48	597 x 1197	10.5	3	LTR

Note: Field tile is rectified with a minimum 3mm grout joint

* Extended lead time on 12 x 24 EXT finish.

Mosaics

Available in all colors

Nominal (in)	Actual Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic**	298 x 298	9.5	3	LTR
Geometric Mosaic***†	217 x 372	9.5	2	LTR

** Mounted on 298mm x 298mm sheet with 3mm grout joints (Coverage area 0.9752 sf)

*** Mounted on 217mm x 372mm sheet with 2mm grout joints (Coverage area 0.5780 sf)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	96 x 597	9.5	3	LTR



6 x 12
Cove Base



4 x 24 Bullnose

Product Performance

Breaking Strength	>450 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.50%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient of Friction Range

LTR (Leather)	0.42 - 0.52	ANSI A326.3
EXT (Textured)	0.60 - 0.70	ANSI A326.3

Shade & Texture Index

Momenti Dolci has a shade variation of V3.

V1	V2	V3	V4	V1 Uniform appearance
				V2 Slight Variation
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V3 variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or textures to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

Application Areas

Finish	Interior Floors (dry)	Interior Walls (wet/dry)	Exterior Walls	Interior Floors (Standing water/shower floors)	Exterior/Paving	Pool/Fountain Full Lining**	Water Line Pool/Fountains
LTR	✓	✓	✓			✓	✓
EXT	✓	✓	✓		✓	✓	✓

** Excludes mesh mounted mosaics. Robbins recommends face mounted or edge mounted mosaics for fully submerged applications. Contact your Robbins sales representative for more information.

NOTE: Trim applications will differ from field tile applications for the same series.

For more information on ANSI- A362.3 visit our website at <https://www.robbins.com>

ROBBINS® Momenti Dolci™ Porcelain Stone®

AHF Products

3840 Hempland Rd.
Mountville, PA
17554

Phone 866 243-2726
Web Robbins.com

Recommended Use

Momenti Dolci LTR is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings[†] in both residential and commercial applications. Momenti Dolci LTR is not recommended for exterior horizontal surfaces or exterior paving. Momenti Dolci EXT is recommended for exterior floors and walls in both residential and commercial applications. See Robbins.com for detailed installation instructions.

[†]Excludes mesh mounted mosaics.

Leather Finish (LTR)

Robbins' Leathered finish creates a subtle glow, visual depth, and a smooth feel. The finish is achieved by running diamond-tipped brushes over the surface of fired porcelain tile, resulting in an incredibly soft feel and tremendous visual richness. While our Leathered finish may be soft to the touch, the DCOF remains high, making it suitable for residential and commercial interior floor and wall applications and exterior vertical surfaces.

Wet area use for Momenti Dolci Mosaics

Robbins produces the Momenti Dolci 2 x 2 and Geometric mosaics with the Leather (LTR) finish. The ANSI A326.3

wet Dynamic COF of Momenti Dolci is ≥ 0.42 . Their small sizes ensure frequent grout joints which provides traction and drainage. Robbins cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Momenti Dolci to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Care and Maintenance

Regular cleaning is the best way to keep Momenti Dolci tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Robbins products is available at Robbins.com.

Information listed here is subject to change. Please refer to Robbins.com for the latest, most accurate information.

Robbins Sample Express

Visit the website to learn more:

Robbins.com

Loose Tile Samples

Sizes may vary depending on product series

Max. of 4 large field tile per order

Standard Shipping

FedEx Ground

National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

Our Warranty

Robbins guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1 and in the performance data section of the Robbins general product catalog. For complete details check our website at Robbins.com.

Trade Organizations



Environmentally Aware



RS-OST-22
REV 12-23